

SenSmart 6000 Series

"The Art of Gas Detection" -

Built with our Proven ST-44 Transmitter



Aluminum "AL" XP model



Non-metallic Poly "PY" model




Aluminum "AL" XP model with Dual Sensor

The State-of-the-art **SenSmart 6000** gas detector is built with our proven 'ST-44' transmitter. This versatile unit has a bright, vivid color display and embedded Ethernet with Webserver and Modbus TCP. The high performance, universal gas detector supports dual smart sensors with different type like Electrochemical, Catalytic Bead, Infrared and Photoionization sensors.

FEATURES HIGHLIGHT:

- CSA Certified for Class 1, Div 1 locations
- Vivid QVGA Backlit Color TFT Display
- Display Color Changes with Alarm Status
- Standard Ethernet Port with Web Server and Modbus TCP
- Dual Smart Sensor Capable
- Sensor Life Indication
- Remote Sensor Mount up to 4000'
- Non-intrusive One-Man Calibration
- Temperature Compensation
- Two RS-485 Ports for Modbus
- 3 Programmable Relays and Fault Relay Available
- Heated elements available for low temperature



Bar Graph Screen

Displays channel's current value as bar graph and numerical value. Includes channel ID, and engineering units. Background changes color and flash on alarm. Flashing color becomes steady after Acknowledge.



30-Minute Trend Screen

View channels most recent 30-minute trend. Top data fields include current reading, and engineering units. Background changes color and flashes on alarm. Flashing color becomes steady after Acknowledge.




Dual Channel Split Screen

In two channel mode, view both channels, current reading and engineering units simultaneously. Background changes color and flashes on alarm. Flashing color becomes steady after Acknowledge.


SPECIFICATIONS

Power Supply	10-30VDC at < 10 watts with relay board (all relays energized)
Display	QVGA backlit color TFT 320x240
Channel One Input	Electrochemical, Catalytic Bead, Infrared, Photoionization Detector sensor
Channel Two Input (Model 6900 Only)	Electrochemical, Infrared , sensor
Standard Output	Dual 3-wire 4-20mA current source. Max loop Resistance 600 ohms @ 24VDC, Ethernet RJ-45 with built-in web Server, Modbus/TCP
Optional Outputs	Three programmable relays plus dedicated FAULT relay (form C , rated 5 amp at 30 VDC or 240 ~VAC RESISTIVE)
Environmental	Dual programmable master / slave MODBUS RS-485 serial interfaces Operating range -40°C to +60°C Sensors include sensor heater for low temperature operation Relative humidity to 95% for IR; to 85% noncondensing when using electrochemical sensors
Housing	Aluminum with epoxy paint standard; Optional #316 stainless steel, Optional UL94 Poly Black Plastic Enclosure
Dimensions	(Aluminum) Width 5.4" (137 mm), Height 8" (203 mm), Depth 5" (127 mm) Shipping weight 6.5 pounds (3 kg) (Poly) Width 5" (127 mm), Height 7" (178 mm), Depth 4" (101 mm) Shipping weight 3 pounds (2 kg)
Approvals	Cast Aluminum Enclosure: Explosion-Proof Cl 1 Div 1 Gr ABCD with 10-0247 (includes sinter) Non-Incendive Cl 1 Div 2 Gr ABCD with 10-0247 or 10-0247IS UL94 Poly Black Plastic Enclosure: Non-Incendive Cl 1 Div 2 Gr ABCD IP66
Warranty	5 year limited warranty For sensor warranty see sensor specifications sheet. .

Poly Housing

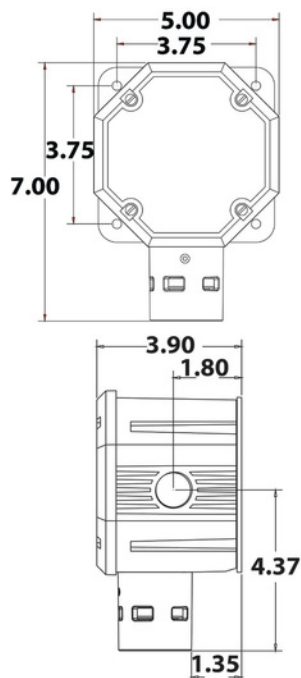

Single Sensor Aluminum Housing

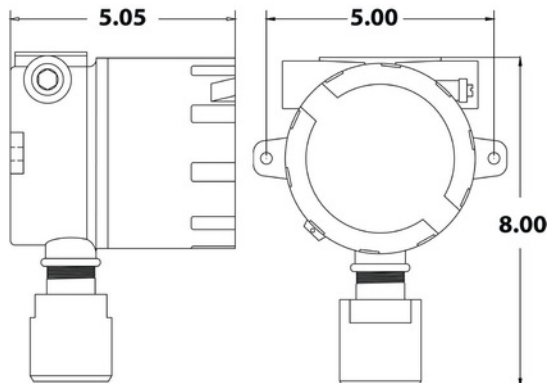

ALL DIMENSIONS IN INCHES

Dual Sensor Aluminum Housing

