

ViewSmart 400 Controller

"The Art of Gas Detection" -

Built with our Proven ST-90 Quad Controller



NEMA 4X Non-Metallic Enclosure

The **ViewSmart 400** 4 Channel Controller provides simultaneous display and alarm functions for four monitored variables. Easy to configure and user friendly, the **ViewSmart 400** can function as a critical alarm controller for toxic gases, combustible gases, vibration, tank levels and other process values.



Painted Carbon Steel Enclosure

CSA certified for *Division 2 potentially hazardous areas*

FEATURES

- Accepts inputs from up to four 4-20mA sensors transmitters for long distance interfacing. Generates 24VDC external device power for transmitters and other devices
- Three adjustable independent alarm levels per channel. "Relay Acknowledge" feature allows silencing of external audible devices during existing alarm conditions
- Graphic LCD readout displays monitored data as bar graphs, engineering units, and 30 minute trends. Alarm LED's flash when new and become steady after acknowledged
- Two standard programmable SPDT alarm relays are configurable for HORN, HIGH, WARN or FAULT alarm conditions
- Modbus® master/slave RS-485 serial port interfaces to Modbus® devices such as PCs, PLCs, DCS, and other RC Systems controllers
- Cal Mode offers pushbutton zero / span calibration for direct sensor interface applications
- Authorization mode allows locking of critical configuration variables
- Touch and magnetic keypad are standard for non-intrusive operation in potentially hazardous locations
- Enclosures Include: Non- Metallic, Epoxy Coated Steel, 316 SS, NEMA 4X, NEMA 7 Explosion-Proof wall mount packaging options available
- Certified to CSA C22.2 NO. 152 for combustible detection and Class I, Division 2, Groups A,B,C,D
- Non-volatile memory retains all configuration data indefinitely
- RS-485 Modbus® master/slave port for up to 128, devices to be multidropped on a single data highway for interrogation by another Modbus® master
- Six additional 5 amp SPDT discrete channel alarm relays available (two are standard)
- 4-20mA outputs, event log, strobe lights and audible annunciators also available
- 50 and 120 Watt 24VDC power supplies available

SPECIFICATIONS

INPUTS

Available inputs include 4-20mA with precision 100 ohm terminating resistor (0-2 Volt inputs may be accepted by removing the socketed terminating resistor) and bridge sensor inputs with adjustable sensor excitation and balance settings

STANDARD ALARM RELAYS (STANDARD)

Two programmable 5 amp 30VDC or 250VAC resistive Form C

ANALOG OUTPUTS (OPTIONAL)

10 bit 4-20mA output. Max load 800ohms with nominal 24VDC power supply

DISCRETE ALARM RELAYS (OPTIONAL)

Six programmable 5 amp 30VDC or 250VAC resistive Form C

SERIAL PORT (OPTIONAL)

Master/Slave RS-485 port equipped with Tx / Rx LED's

Protocol is Modbus® RTU

DISPLAY

128 x 64 pixel graphic LCD with backlight displays bar graphs, trends, and engineering units. Six discrete LED's indicate alarm status, CAL MODE, keypad activity

AMBIENT TEMPERATURE RANGE

-25 to +60 degrees C

POWER SUPPLY

100-240VAC / 10-30VDC are standard primary power supplies

APPROVALS

CSA C22.2 No 1010.1 and C22.2 No.152 for combustibles and ISA S82.02;

UL 1604 / C22.2 No 213 (NEMA 4X = Division 2 Groups A,B,C,D,

EN55011 and EN61000 (CE Mark)

90-12 = NEMA 7 Division 1 Group B,C,D

MODELS

90-50 ViewSmart 400 PY in Non Metallic

90-51 ViewSmart 400 PCS in NEMA 4 painted carbon steel

90-52 ViewSmart 400 SS in NEMA 4X, 316 stainless steel

90-12 ViewSmart 400 XP in bolt on lid NEMA 7 cast aluminum

ST-90 OPTIONS/ACCESSORIES

10-0221/4 4-20mA analog input PCB

10-0222 Optional relay board with six programmable 5 amp Form C relays

*10-0328 900MHz wireless kit with rubber dipole antenna

*10-0355 2.4GHz wireless kit with rubber collinear antenna

10-0308 Quad 4-20mA outputs

10-0309 Quad bridge sensor inputs

10-0253 RS-485 / RS-232 Modbus® RTU interface

*10-0337 100dB piezo audible option

*10-0284 Division 2 xenon red strobe light option

*10-0285 Division 2 xenon amber strobe light option

*10-0316 Division 2 xenon blue strobe light option

1000-2259 50 Watt AC/DC power supply module

1000-2373 120 Watt AC/DC power supply module

10-0314 NEMA 4X/7 Division 1, 50 Watt 24VDC external power supply

10-0315 NEMA 4X Division 2, 50 Watt 24VDC external power supply


*These items only available with NEMA 4 enclosure

ViewSmart 400 NEMA 4X Non-Metallic Wall Mount

ViewSmart 400 NEMA 4X 316 SS Wall Mount

ViewSmart 400 Explosion Proof Wall Mount

ViewSmart 400 NEMA4 Painted Steel

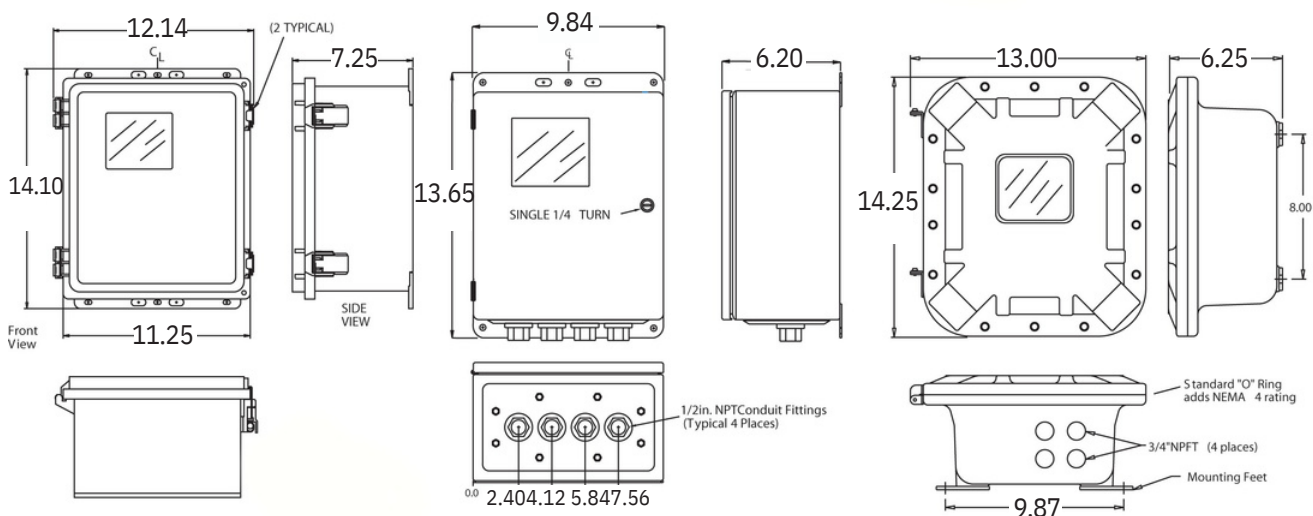

ALL DIMENSIONS IN INCHES