



1500 / 2500 SERIES

Safety Relief Valves



*The
Original
Self-Aligning
Technology®*

Precise.

Quality.

Reliable.



SINCE 1958



Taylor Valve's line of high quality 1500/2500 Series safety relief valves are manufactured in accordance with stringent quality control procedures mandated by the American Society of Mechanical Engineers (ASME) and its inspection arm, the National Board of Boiler and Pressure Vessel Inspectors of Columbus, Ohio. Many of Taylor Valve's safety relief valves have carried the ASME UV (Unfired Vessel) Code Stamp since 1958.

A variety of materials and designs are available to meet the most exacting requirements of severe and critical applications.

High Performance Safety Relief Valves

Series 1500 Threaded & Flanged Safety Relief Valves

General Design Features

- Suitable for Air/Gas & Liquid Service Applications
- Both Flat Lapped Metal-To-Metal Seat & Bubble Tight Soft Seat Designs Available
 - Manufactured in Accordance with ASME Code Section XIII, NBBI Capacity Certified
- Pressure Ranges from 15 PSI to 6170 PSI
- Temperature Ranges from -300°F to +800°F

Series 2500 Flanged High Capacity Safety Relief Valves

General Design Features

- Available with NACE & Bellows Options
- Self-Aligning Disc & Guided One-Piece Disc Holder Assembly
- Interchangeable Discs for Metal-To-Metal & Soft Seat Seals
- Same Internals for Air/Gas & Liquid Service Applications
- Meets API 526 & 527 with Available Orifices "D" through "T"
- Manufactured in Accordance with ASME Code Section XIII, NBBI Capacity Certified

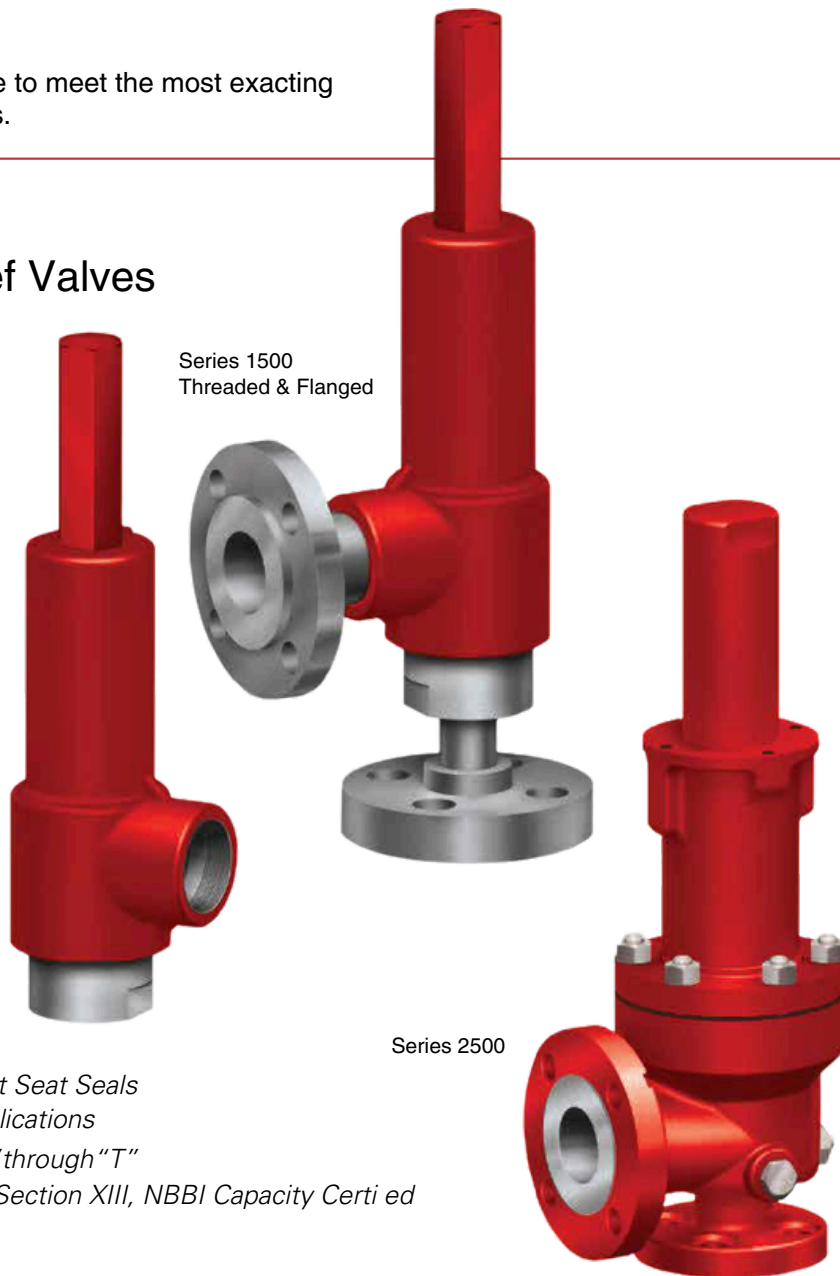


Table of Contents

Series 1500/2500 Design Features 2

Series 1500

How to Order & Sizing Equations. 3

Parts List & Materials 4-5

Dimensional Data & Weights. 6-7

Series 2500


How to Order & Sizing Equations. 8

Dimensional Data & Weights 9

Parts List & Materials. 10-11



Part Number Codes & Engineering Data

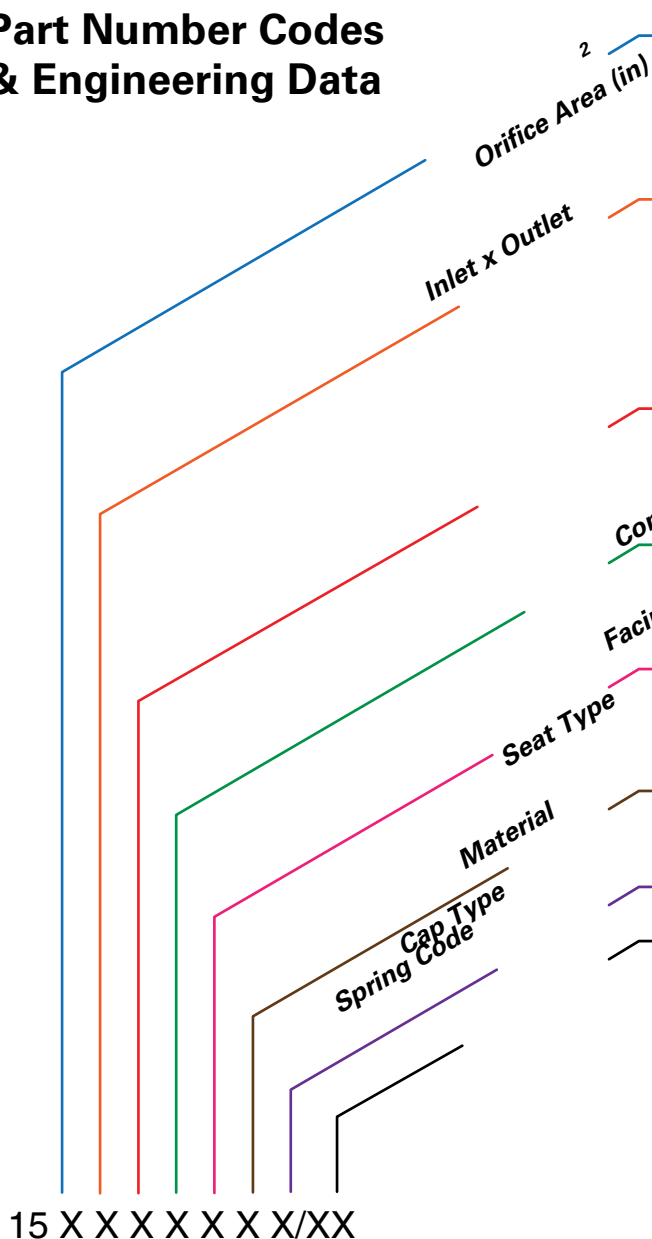

C • 0.058	E • 0.230	G • 0.590
D • 0.129	F • 0.366	
Size /Available Orifice (Connection)		
E • 1/2" x 3/4" (C Orifice Only)		
F • 3/4" x 3/4" (C, D Orifice Only)		
J • 1" x 2" (E, F Orifice Only)		
1 • 1/2" x 1" (C Orifice Only)		
2 • 3/4" x 1" (C, D Orifice Only)		
3 • 1" x 1" (C, D Orifice Only)		
5 • 1" x 1-1/2" (D, E, F Orifice Only)		
6 • 1 1/2" x 1-1/2" (D, E, F Orifice Only)		
7 • 1 1/2" x 2" (E, F, G Orifice Only)		
8 • 2" x 2" (E, F, G Orifice Only)		
Gender		
M • M x F		
F • F x F		
Flanged		
A • 150x150 B		
• 300 x 150		
C • 600 x 150		
D • 600 x 300		
E • 1500 x 300		
G • 2500 x 300		
Flange x Thread		
0 • NPT		
1 • RFXRF		
2 • RTJxRF		
Facing		
E • EPDM		
K • Kalrez®		
M • Metal		
N • Nitrile		
T • Teflon®		
V • Fluorocarbon		
Body/ Spring/ Trim		
0 • WCB/CS/316SS		
1 • WCB/316SS/316SS		
2 • WCB (NACE)/ Inconel®/ 316SS		
3 • CF8M/316SS/316SS		
4 • CF8M (NACE)/Inconel®/316SS		
0 • Closed		
L • Open Lever		
P • Packed Lever		
G • Closed w/Gag		
M • Lever w/Gag		
S • Packed w/Gag		

Consult Factory for Spring Chart.

C Orifice is available in soft seat only.

Lift lever is required for ASME code service for air or water over 140°F.

Call for market price on Kalrez® seat material.

Temperature Limits

Temperature	Seat Material					Teflon®
	Nitrile	EPDM	Viton®	Neoprene	Kalrez®	
Lower °F	-65	-70	-15	-45	30	-300
Upper °F	225	300	400	300	550	400

Sizing Equations

US Units

Air/Gas

$$W = CK_d A P_1 \sqrt{\frac{M}{TZ}}$$

Liquid

$$Q = 38 K_d A \sqrt{\frac{P_1 P}{G}}$$

Where

$$P_1 = 1.1 P_{set} + 14.7 \text{ over } 30 \text{ psi or}$$

$$P_1 = P_{set} + 17.7 \text{ under } 30 \text{ psi}$$

$$C = 520 \sqrt{k \left(\frac{2}{k+1} \right)^{\frac{k+1}{k-1}}}$$

W = Capacity in lbm/hr

P_{set} = Set Pressure in psig

P_d = Discharge Pressure

A = Orifice Area

K_d = .863 for Air/Gas/Steam

K_d = .659 for Liquid

K_v = Viscosity Correction Factor

Q = Capacity in GPM

Z = Compressibility Factor

T = Temperature in °R

k = Ratio of Specific Heats

M = Molecular Weight

G = Specific Gravity

SI Units

Air/Gas

$$W = 13160 CK_d A P_1 \sqrt{\frac{M}{TZ}}$$

Liquid

$$Q = \frac{K_d K_v A}{11.78} \sqrt{\frac{P_1 P}{G}}$$

Where

$$P_1 = 1.1 P_{set} + 101.3 \text{ over } 207 \text{ kPa or}$$

$$P_1 = P_{set} + 122 \text{ under } 207 \text{ kPa}$$

$$C = 520 \sqrt{k \left(\frac{2}{k+1} \right)^{\frac{k+1}{k-1}}}$$

W = Capacity in kg/hr

P_{set} = Set Pressure in kPag

P_d = Discharge Pressure

A = Orifice Area

K_d = .863 for Air/Gas/Steam

K_d = .659 for Liquid

K_v = Viscosity Correction Factor

Q = Capacity in liter/min

Z = Compressibility Factor

T = Temperature in °K

k = Ratio of Specific Heats

M = Molecular Weight

G = Specific Gravity

Contact Factory in order to receive sizing program and/ or capacity charts.

Parts List & Material Selection


Index	Description	Materials, Codes & Temperature Ranges				
		-20°F to +450°F (-29°C to +232°C) 0	-20°F to +650°F (-29°C to +343°C) 1	NACE MR0175 -20°F to +750°F (-29°C to +399°C) 2	-300°F to +800°F (-149°C to +426°C) 3	NACE MR0175 -300°F to +800°F (-149°C to +426°C) 4
1	Cap	Carbon Steel	Carbon Steel	Carbon Steel	316 Stainless Steel	316 Stainless Steel
2	Adjusting Screw	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
3	Adjusting Nut	Carbon Steel	Carbon Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
4	O-Ring	Specify	Specify	Specify	Specify	Specify
5	Spring Plate	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
6	Stem	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
7	Spring	316 Stainless Steel	316 Stainless Steel	Inconel® X750	316 Stainless Steel	Inconel® X750
8	Stem Head	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
9	Disc Holder	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
10	Disc Retainer	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
11	Disc	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
12	Body	WCB	WCB	WCB	CF8M	CF8M
13	Guide	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
14	Nozzle	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
15	Lap Joint Flange (Outlet)	Carbon Steel	Carbon Steel	Carbon Steel	316 Stainless Steel	316 Stainless Steel
16	Lap Joint Stub End (Outlet)	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
17	Lap Joint Flange (Inlet)	Carbon Steel	Carbon Steel	Carbon Steel	316 Stainless Steel	316 Stainless Steel
18	Lap Joint Stub End (Inlet)	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Open Lift Lever						
19	Cap	WCB	WCB	WCB	CF8M	CF8M
20	Release Washer	Carbon Steel	Carbon	Carbon	316 Stainless Steel	316 Stainless Steel
21	Release Nut	Carbon Steel	Steel	Steel	316 Stainless Steel	316 Stainless Steel
22	Lever Pin	Carbon Steel	Carbon	Carbon	316 Stainless Steel	316 Stainless Steel
23	Lever	Carbon Steel	Steel	Steel	316 Stainless Steel	316 Stainless Steel
Packed Lift Lever						
24	Cap	WCB	WCB	WCB	CF8M	CF8M
25	Release Nut	Carbon Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
26	Release Washer	Carbon Steel	Carbon Steel	Carbon Steel	316 Stainless Steel	316 Stainless Steel
27	Lever Shaft	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
28	Gland O-Ring	Same as Item 4	Same as Item 4	Same as Item 4	Same as Item 4	Same as Item 4
29	Lock Nut	Carbon Steel	Carbon Steel	Carbon Steel	316 Stainless Steel	316 Stainless Steel
30	Lever Pin	Carbon Steel	Carbon Steel	Carbon Steel	302 Stainless Steel	302 Stainless Steel
31	Shaft O-Ring	Same as Item 4	Same as Item 4	Same as Item 4	Same as Item 4	Same as Item 4
32	Gland Nut	Carbon Steel	316 Stainless Steel	Carbon Steel	316 Stainless Steel	316 Stainless Steel
33	Lever	Carbon Steel	Carbon Steel	Carbon Steel	316 Stainless Steel	316 Stainless Steel
Soft Seat Option						
34	Disc	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
35	Disc Retainer Screw	316 Stainless Steel	Steel	316 Steel	316 Stainless Steel	316 Stainless Steel
36	O-Ring ⁽¹⁾	Specify	Specify	Specify	Specify	Specify

(1) Soft Seat Valve Only


(2) Taylor Valve reserves the right to substitute Inconel® 50 in lieu of 316SS for higher pressure springs.

Materials: WCB-ASME SA216, CF8M-ASME SA351


1500 Component Parts

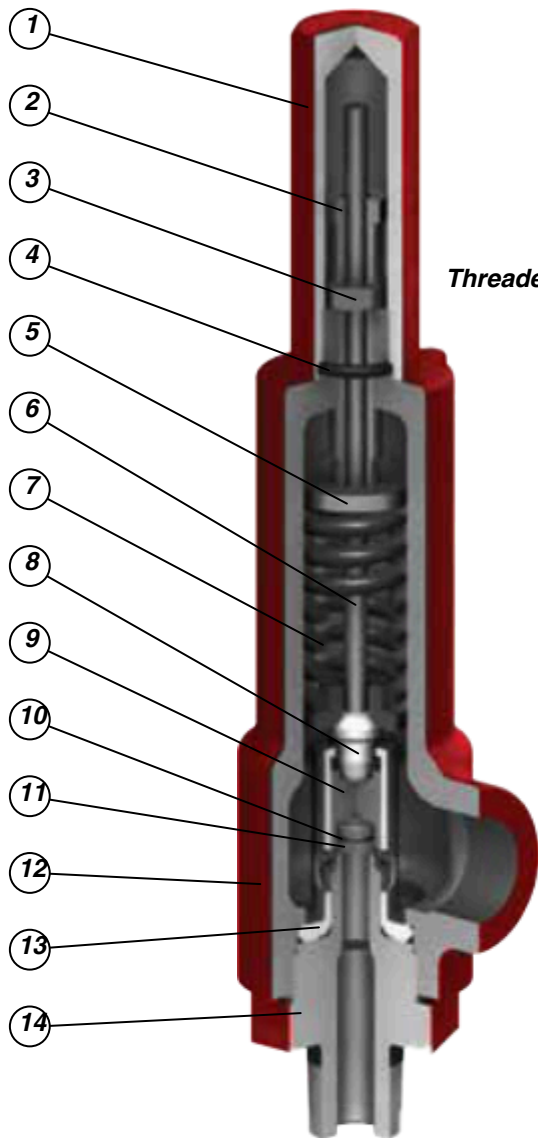


Threaded

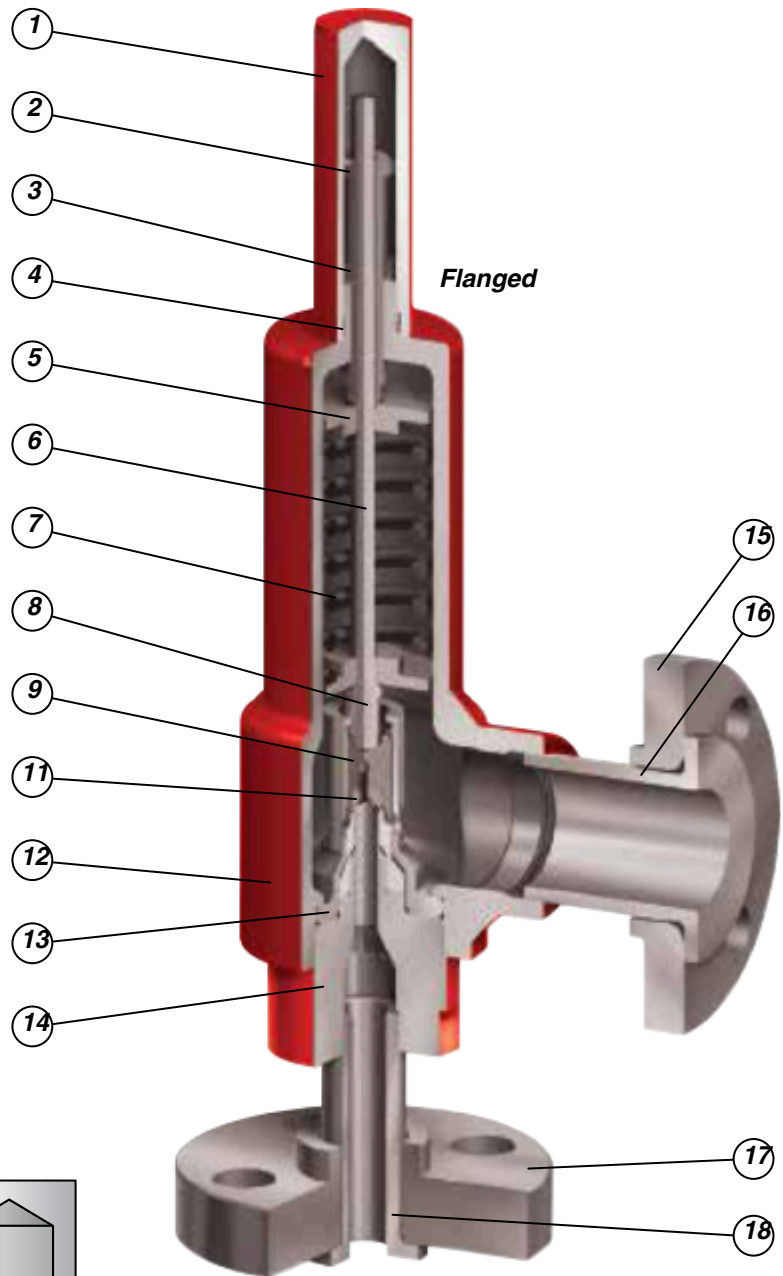


Flanged

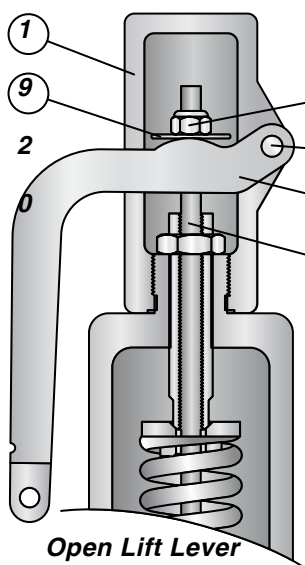

Open Lift Lever

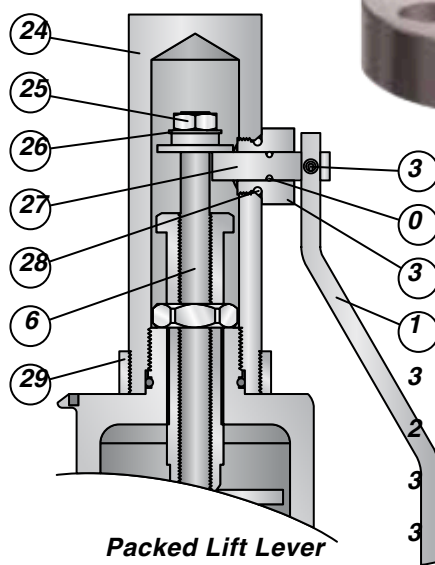


Packed Lift Lever

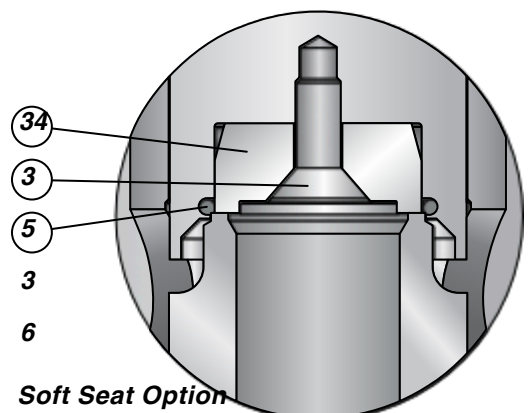

Soft Seat Option

Threaded & Flanged, Dim. Data & Weights



Series 1500 Threaded

Orifice	Inlet Outlet	FNPT x FNPT MNPT x FNPT	Max Set (psig)	Dimension (in.)			Wt. (lbs.)
				A	B	C	
C API Area .058 in. ² Actual Area .129 in. ²	1/2 x 3/4	MNPT x FNPT	3000	3-1/4	1-3/4	12-1/4	8
		FNPT x FNPT	6150	3-1/4	1-3/4	12-1/4	8
		MNPT x FNPT	6150	3-1/4	1-3/4	12-1/4	8
	3/4 x 3/4	MNPT x FNPT	6150	3-1/4	1-3/4	12-1/4	8
		FNPT x FNPT	6150	3-1/4	1-3/4	12-1/4	8
		MNPT x FNPT	3000	3-1/4	1-3/4	12-1/4	8
	1/2 x 1	MNPT x FNPT	6150	3-1/4	1-3/4	12-1/4	8
		FNPT x FNPT	6150	3-1/4	1-3/4	12-1/4	8
		MNPT x FNPT	6150	3-1/4	1-3/4	12-1/4	8
	3/4 x 1	MNPT x FNPT	6150	3-1/4	1-3/4	12-1/4	8
		FNPT x FNPT	6150	3-1/4	1-3/4	12-1/4	8
		MNPT x FNPT	6000	3-1/4	1-3/4	12-1/4	8
D API Area .110 in. ² Actual Area .129 in. ²	3/4 x 3/4	MNPT x FNPT	2600	3-1/4	1-3/4	12-1/4	8
		FNPT x FNPT	3150	3-1/4	1-3/4	12-1/4	8
	3/4 x 1	MNPT x FNPT	2600	3-1/4	1-3/4	12-1/4	8
		FNPT x FNPT	3150	3-1/4	1-3/4	12-1/4	8
		MNPT x FNPT	3150	3-1/4	1-3/4	12-1/4	8
	1 x 1	MNPT x FNPT	3150	3-1/4	1-3/4	12-1/4	8
		FNPT x FNPT	3150	3-1/4	1-3/4	12-1/4	8
		MNPT x FNPT	3150	3-1/4	1-3/4	12-1/4	8


Note: Weights are approximate.

Overall height with lever: Add 1" to outlet C & D valves.

Add 1-1/2" to outlet E, F & G valves.

Orifice	Inlet Outlet	FNPT x FNPT MNPT x FNPT	Max Set (psig)	Dimension (in.)			Wt. (lbs.)
				A	B	C	
D API Area .110 in. ² Actual Area .129 in. ²	3/4 x 1-1/2	MNPT x FNPT	2700	3-11/16	2-9/16	13-5/8	12
		FNPT x FNPT	3950	3-11/16	2-9/16	13-5/8	12
	1 x 1-1/2	MNPT x FNPT	3950	3-11/16	2-9/16	13-5/8	12
		FNPT x FNPT	3950	3-11/16	2-9/16	13-5/8	12
	1-1/2 x 1-1/2	MNPT x FNPT	3950	3-11/16	2-9/16	13-5/8	12
		FNPT x FNPT	3950	3-11/16	2-9/16	13-5/8	12
E API Area .196 in. ² Actual Area .230 in. ²	1 x 1-1/2	MNPT x FNPT	2400	3-11/16	2-9/16	13-5/8	31
		FNPT x FNPT	2500	3-11/16	2-9/16	13-5/8	31
	1-1/2 x 1-1/2	MNPT x FNPT	2500	3-11/16	2-9/16	13-5/8	31
		FNPT x FNPT	2500	3-11/16	2-9/16	13-5/8	31
	1 x 2	MNPT x FNPT	2400	4	3-1/4	16-1/2	31
		FNPT x FNPT	2500	4	3-1/4	16-1/2	31
		MNPT x FNPT	3850	4	3-1/4	16-1/2	31
		FNPT x FNPT	3850	4	3-1/4	16-1/2	31
F API Area .307 in. ² Actual Area .366 in. ²	1 x 1-1/2	MNPT x FNPT	900	4	3-1/4	16-1/2	31
		FNPT x FNPT	1550	4	3-1/4	16-1/2	31
		MNPT x FNPT	1550	4	3-1/4	16-1/2	31
	1-1/2 x 1-1/2	MNPT x FNPT	900	4	3-1/4	16-1/2	31
		FNPT x FNPT	1550	4	3-1/4	16-1/2	31
		MNPT x FNPT	1550	4	3-1/4	16-1/2	31
	1 x 2	MNPT x FNPT	1550	4	3-1/4	16-1/2	31
		FNPT x FNPT	1550	4	3-1/4	16-1/2	31
		MNPT x FNPT	1550	4	3-1/4	16-1/2	31
	1-1/2 x 2	MNPT x FNPT	1550	4	3-1/4	16-1/2	31
		FNPT x FNPT	1550	4	3-1/4	16-1/2	31
		MNPT x FNPT	1650	4	3-1/4	16-1/2	34
G API Area .503 in. ² Actual Area .590 in. ²	1-1/2 x 2	MNPT x FNPT	1650	4-3/8	3-3/4	19-3/8	34
		FNPT x FNPT	1650	4-3/8	3-3/4	19-3/8	34
		MNPT x FNPT	1650	4-3/8	3-3/4	19-3/8	34
	2 x 2	MNPT x FNPT	1650	4-3/8	3-3/4	19-3/8	34
		FNPT x FNPT	1650	4-3/8	3-3/4	19-3/8	34
		MNPT x FNPT	1650	4-3/8	3-3/4	19-3/8	34

Series 1500 Flanged

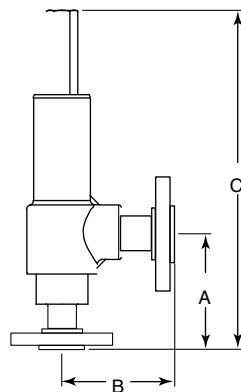

Orifice	Inlet Outlet	FLANGE Inlet x Outlet	Max Set (psig)	Dimension (in.)			Wt. (lbs.)
				A	B	C	
C API Area .058 in. ² Actual Area .129 in. ²	1/2 x 3/4	150 x 150	285	6	4	14-13/16	11
		300 x 150	740	6	4	14-13/16	12
		600 x 150	1480	6	4	14-13/16	12
		600 x 300	1480	6	4	14-13/16	13
		1500 x 300	3400	7-1/2	5	16-5/16	16
	1/2 x 1	150 x 150	285	6	4	14-13/16	11
		300 x 150	740	6	4	14-13/16	12
		600 x 150	1480	6	4	14-13/16	12
		600 x 300	1480	6	4	14-13/16	13
		1500 x 300	3400	7-1/2	5	16-5/16	16
	3/4 x 3/4	150 x 150	285	6-1/4	4	15-1/16	13
		300 x 150	740	6-1/4	4	15-1/16	14
		600 x 150	1480	6-1/4	4	15-1/16	14
		600 x 300	1480	6-1/4	5	15-1/16	15
		1500 x 300	3705	6-1/4	5	15-1/16	18
		150 x 150	285	6-1/4	4	15-1/16	13
		300 x 150	740	6-1/4	4	15-1/16	14
		600 x 150	1480	6-1/4	4	15-1/16	14


Series 1500 Flanged, Continued

Orifice	Inlet x Outlet	FLANGE Inlet x Outlet	MaxSet (psig)	Dimension (in.)			Wt. (lbs.)
				A	C	B	
C Actual Area .058 in. ²	3/4 x 1	150 x 150	285	6-1/4	15-1/16		13
		300 x 150	740	6-1/4	15-1/16		14
		600 x 150	1480	6-1/4	15-1/16		14
		600 x 300	1480	6-1/4	15-1/16		15
		1500 x 300	3705	6-3/16	15-1/16		18
	1 x 1	150 x 150	285	6-1/2	4-1/4	15-5/16	14
		300 x 150	740	6-1/2	4-1/4	15-5/16	15
		600 x 150	1480	6-1/2	4-1/4	15-5/16	15
		600 x 300	1480	7-1/2	5	16-1/4	16
		1500 x 300	3705	7-1/2	5	16-1/4	21
		2500 x 300	6170	7-1/2	5	16-1/4	24
D API Area .110 in. ² Actual Area .129 in. ²	3/4 x 1	150 x 150	285	6-1/4	4	14	13
		300 x 150	740	6-1/4	4	14	14
		600 x 150	1480	6-1/4	4	14	14
		600 x 300	1480	6-1/4	5	14	15
		1500 x 300	1750	6-1/4	5	14	18
	1 x 1	150 x 150	285	6-1/2	4-1/4	14-1/4	14
		300 x 150	740	6-1/2	4-1/4	14-1/4	15
		600 x 150	1480	6-1/2	4-1/4	14-1/4	15
		600 x 300	1480	7-1/2	5	15-3/8	16
		1500 x 300	2000	7-1/2	5	15-3/8	20
		2500 x 300	2000	7-1/2	5	15-3/8	25
		150 x 150	285	6-1/4	5	15-1/8	15
	1 x 1-1/2	300 x 150	740	6-1/4	5	15-1/8	16
		600 x 150	1480	6-1/4	5	15-1/8	17
		600 x 300	1480	6-1/4	5	15-1/8	20
		1500 x 300	3500	6-1/4	5-3/4	15-1/8	24
		2500 x 300	3500	6-1/4	5-3/4	15-1/8	29
		150 x 150	285	7-1/4	5-3/4	16-1/8	17
	1-1/2 x 1-1/2	300 x 150	740	7-1/8	5	16	20
		600 x 150	1480	7-1/8	5	16	20
		600 x 300	1480	7-1/8	5	16	20
		1500 x 300	3500	7-1/8	5-3/4	16	20
		2500 x 300	3500	7-1/4	5-3/4	16	42
		150 x 150	285	6-1/4	5	15-1/8	19
E API Area .196 in. ² Actual Area .230 in. ²	1 x 1-1/2	300 x 150	740	6-1/4	5	15-1/8	20
		600 x 150	1480	6-1/4	5	15-1/8	20
		600 x 300	1480	6-1/4	5	15-1/8	24
		1500 x 300	1750	6-1/4	5-3/4	15-1/8	28
		150 x 150	285	6-1/4	5	15-1/8	24
	1-1/2 x 1-1/2	300 x 150	740	6-1/4	5	15-1/8	24
		600 x 150	1480	6-1/4	5	15-1/8	24
		600 x 300	1480	6-1/4	5	15-1/8	23
		1500 x 300	2000	7-1/4	5-3/4	15-1/8	36
		2500 x 300	2000	7-1/4	5-3/4	16-1/8	46

Orifice	Inlet x Outlet	FLANGE Inlet x Outlet	MaxSet (psig)	Dimension (in.)			Wt. (lbs.)
				A	B	C	
E API Area .196 in. ² Actual Area .230 in. ²	1 x 2	150 x 150	285	6-1/2	6	18-13/16	29
		300 x 150	740	6-1/2	6	18-13/16	31
		600 x 150	1480	6-1/2	6	18-13/16	31
		600 x 300	1480	6-1/2	6	18-13/16	33
		1500 x 300	3500	8-1/4	6	19-7/8	37
	1-1/2 x 2	150 x 150	285	6-1/2	6	18-1/8	23
		300 x 150	740	6-1/2	6	18-1/8	26
		600 x 150	1480	6-1/2	6	18-1/8	26
		600 x 300	1480	6-1/2	6	18-1/8	27
		1500 x 300	3500	8-1/4	6	19-7/8	37
		2500 x 300	3500	8-1/4	6	19-7/8	47
F API Area .307 in. ² Actual Area .366 in. ²	2 x 2	150 x 150	285	6-3/4	6	18-3/8	47
		300 x 150	740	6-3/4	6	18-3/8	26
		600 x 150	1480	6-3/4	6	18-3/8	28
		600 x 300	1480	6-3/4	6	18-3/8	30
		1500 x 300	3500	8-1/4	6	19-7/8	44
	1 x 1-1/2	150 x 150	285	6-1/4	5	18	38
		300 x 150	740	6-1/4	5	18	39
		600 x 150	1480	5-1/8	5	17	37
		600 x 300	1480	5-1/8	5-3/4	17	40
		1500 x 300	285	6-1/2	5	18-1/8	39
		2500 x 300	285	6-1/2	5	18-1/8	43
		150 x 150	740	7-1/8	5	18-3/4	43
	1-1/2 x 1-1/2	300 x 150	1480	7-1/8	5	18-3/4	43
		600 x 150	1480	7-1/8	5-3/4	18-3/4	46
		600 x 300	285	6-1/2	6	18-13/16	30
		150 x 150	740	6-1/2	6	18-13/16	32
		300 x 150	1200	6-1/2	6	18-13/16	32
		600 x 150	1200	6-1/2	6	18-13/16	34
		600 x 300	285	6-1/2	6		42
	1 x 2	150 x 150	740	6-1/2	6	18-13/16	32
		300 x 150	1200	6-1/2	6	18-13/16	32
		600 x 150	1200	6-1/2	6	18-13/16	34
		600 x 300	285	6-1/2	6		42
		150 x 150	740	6-1/2	6	18-1/8	45
		300 x 150	1480	6-1/2	6	18-1/8	45
		600 x 150	1480	6-1/2	6	18-1/8	46
G API Area .503 in. ² Actual Area .590 in. ²	1-1/2 x 2	600 x 300	1500	8-1/4	6	18-1/8	55
		1500 x 300	285	6-3/4	6	19-7/8	44
		150 x 150	740	6-3/4	6	18-3/8	46
		300 x 150	1480	6-3/4	6	18-3/8	47
		600 x 150	1480	6-3/4	6	18-3/8	49
		600 x 300	1500	8-1/4	6	18-3/8	63
		1500 x 300	285	7-1/8	6-1/2	19-7/8	45
	2 x 2	150 x 150	740	7-1/8	6-1/2	21	48
		300 x 150	1480	7-1/8	6-1/2	21	50
		600 x 150	1480	7-1/8	6-1/2	21	51
		600 x 300	285	7-1/8	6-1/2	21	48
		150 x 150	740	7-1/8	6-1/2	21	51
	2 x 2	300 x 150	1480	7-1/8	6-1/2	21	51
		600 x 150	1480	7-1/8	6-1/2	21	54
		600 x 300				21	

Note: Weights are approximate.
Overall height with lever: Add 1" to outlet C, D & E valves. Add 1-1/2" to outlet F & G valves.

Part Number Codes & Engineering Data

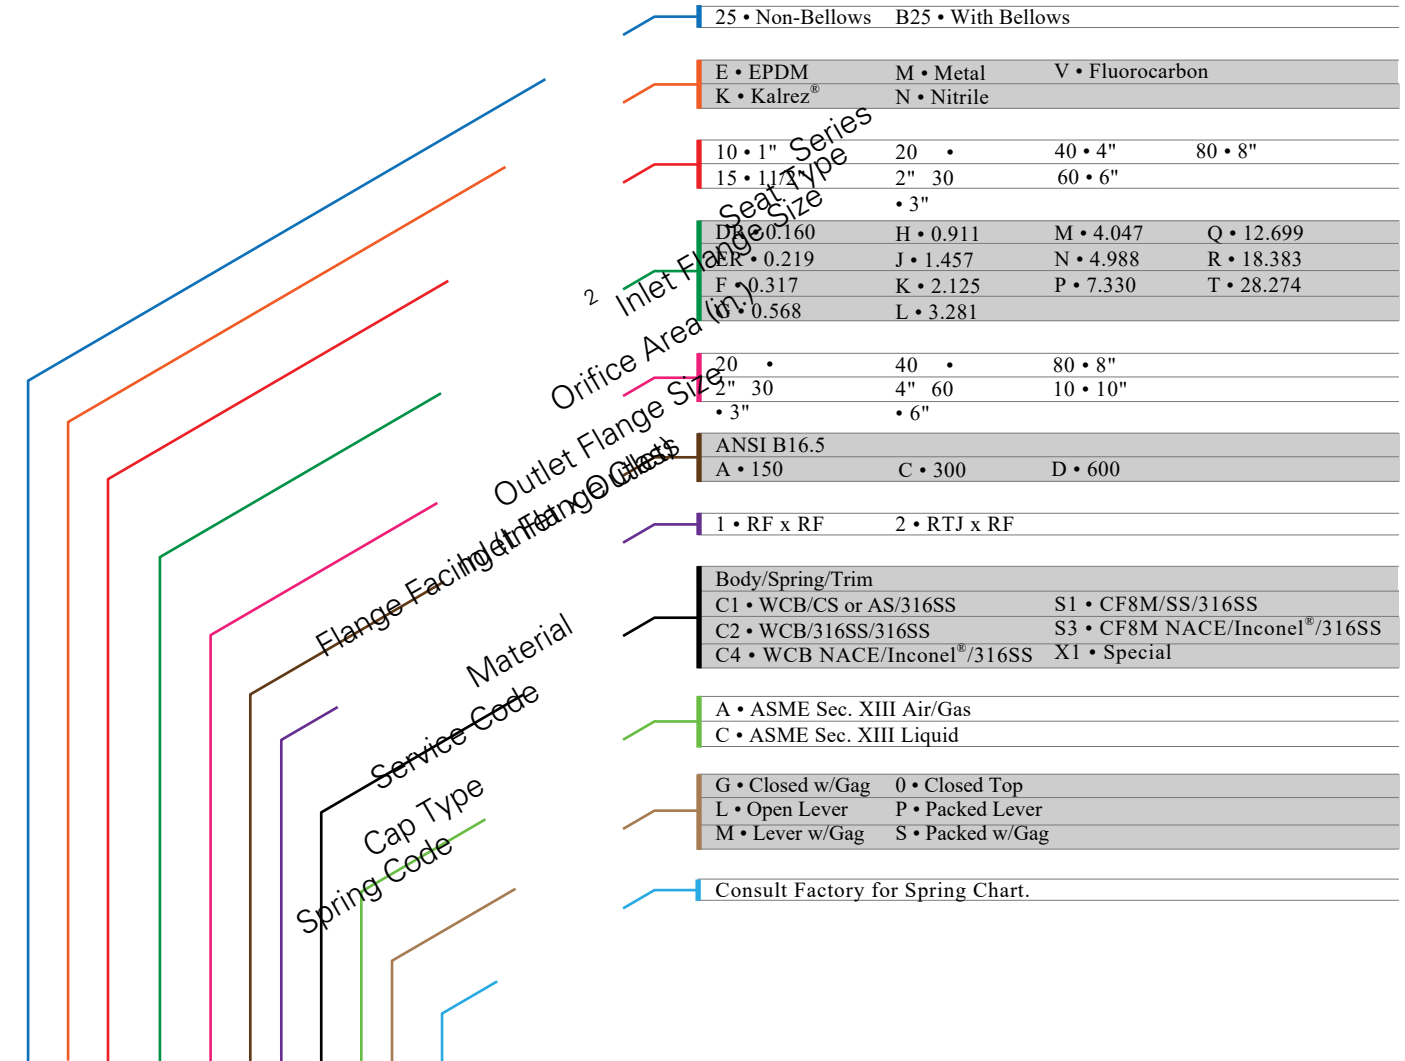

XX X XX XX XX X X XX X X/XX
Sizing Equations

Air/Gas

$$W = CK_d AP_1$$

Liquid

$$Q = 38 KKA \sqrt{\frac{M}{TZ}}$$

$$\sqrt{\frac{P - P_d}{G}}$$

Where

$$P1 = 1.1 P_{set} + 14.7 \text{ over } 30 \text{ psi or}$$

$$P1 = P_{set} + 17.7 \text{ under } 30 \text{ psi}$$

$$C = 520 \sqrt{k \left(\frac{2}{k+1} \right)^{\frac{k+1}{k-1}}}$$

US Units

W = Capacity in lbm/hr

Pset = Set Pressure in psig

Pd = Discharge Pressure

A = Orifice Area

Kd = .868 for Air/Gas/Steam

Kd = .664 for Liquid

Kv = Viscosity Correction Factor

Q = Capacity in GPM

Z = Compressibility Factor

T = Temperature in °R

k = Ratio of Specific Heats

M = Molecular Weight

G = Specific Gravity

Air/Gas

$$W = 13160 CK_d AP_1 \sqrt{\frac{M}{TZ}}$$

Liquid

$$Q = \frac{Kd K_v A}{11.78} \sqrt{\frac{P - P_d}{G}}$$

Where

$$P1 = 1.1 P_{set} + 101.3 \text{ over } 207 \text{ kPa or}$$

$$P1 = P_{set} + 122 \text{ under } 207 \text{ kPa}$$

$$C = 520 \sqrt{k \left(\frac{2}{k+1} \right)^{\frac{k+1}{k-1}}}$$

SI Units

W = Capacity in kg/hr

Pset = Set Pressure in kPag

Pd = Discharge Pressure

A = Orifice Area

Kd = .868 for Air/Gas/Steam

Kd = .664 for Liquid

Kv = Viscosity Correction Factor

Q = Capacity in liter/min

Z = Compressibility Factor

T = Temperature in °K


k = Ratio of Specific Heats

M = Molecular Weight

G = Specific Gravity

Contact Factory in order to receive sizing program and/or capacity charts.

Flanged, Dimensional Data & Weights

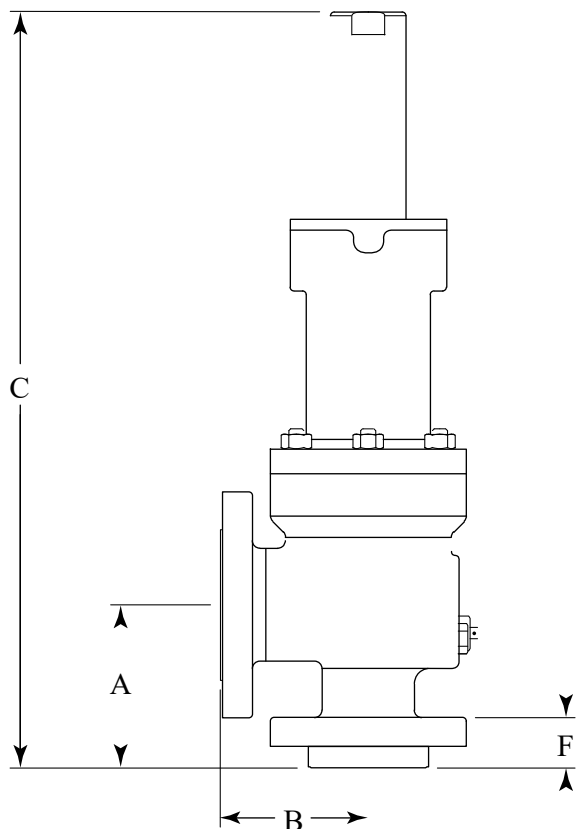

Inlet x Outlet	Flange Ratings	Type*	MaxSet (psig)	Dimension (in.)				Wt. (lbs.)
				A	B	C	F	
1 x 2	150 x 150	10DR20A	285	4-1/8	4-1/2	21-1/2	21-1/8	49
	300 x 150	10DR20C	740	4-1/8	4-1/2	21-1/2	21-3/8	50
	600 x 150	10DR20D	1480	4-1/8	4-1/2	21-1/2	21-3/8	50
1 x 2	150 x 300	10ER20A	285	4-1/8	4-1/2	21-1/2	15-1/8	49
	150 x 300	10ER20C	740	4-1/8	4-1/2	21-1/2	15-3/8	50
	x 150	10ER20D	1480	4-1/8	4-1/2		1-3/8	50
1-1/2 x 2	600 x 150	15F20A	285	4-7/8	4-3/4			54
	150 x 150	15F20C	740	4-7/8	6			64
	150 x 150	15F20D	1480	4-7/8	6	21-1/2	21-1/2	64
1-1/2 x 3	150 x 150	15G30A	285	4-7/8	4-3/4	1-5/16		60
	300 x 150	15G30C	740	4-7/8	6	21-1/2	1-7/16	70
	600 x 150	15G30D	1480	4-7/8	6	21-1/2	1-1/2	73
1-1/2 x 3	150 x 150	15H30A	285	5-1/8	4-7/8	24-1/2	1-1/2	60
2 x 3	150 x 150	20H30C	740	5-1/8	4-7/8	24-1/2	1-1/2	65
	150 x 150	20H30D	1480	6-1/16	6-3/8	29	1-1/2	85
	300 x 150	20J30A	285	5-3/8	4-7/8	25-1/8	1-1/2	75

Note: Weights are approximate.

600 x 150
150 x 150
300 x 150
600 x 150
150 x 150

Inlet x Outlet	Flange Ratings	Type*	MaxSet (psig)	Dimension (in.)				Wt. (lbs.)
				B	A	C	F	
3 x 4	300 x 150	30J40C	740	7-1/8	8	30-3/8	1-15/16	110
	600 x 150	30J40D	1480	7-1/8	8	25-7/8	1-15/16	112
3 x 4	150 x 150	30K40A	28	6-3/8	8	30-3/8	1-15/16	126
	300 x 150	30K40C	5	6-3/8	8			136
	600 x 150	30K40D	1480	7-1/8	8	29-3/4	2-1/4	138
3 x 4	150 x 150	30L40A	285	6-1/2	8	32-3/4	1-3/4	140
4 x 6	300 x 150	40L60C	740	7-1/16	7-1/8	32-3/4	2-3/16	220
	600 x 150	40L60D	1000	7-1/16	8	29-3/4	1-1/2	230
4 x 6	150 x 150	40M60A	285	7	7-1/4	32-3/4	1-7/8	185
	300 x 150	40M60C	740	7	7-1/4	33-3/4	2-3/16	230
	600 x 150	40M60D	1000	7	8	33-1/2	2	300
	150 x 150	40N60A	28	7-3/4	8-1/4	33-1/2	1-1/2	220
4 x 6	300 x 150	40N60B	5	7-3/4	8-1/4	34-3/4	1-7/8	225
	300 x 150	40N60C	28	7-3/4	8-1/4	37-7/8	1-7/8	260
	600 x 150	40N60D	1000	7-3/4	8-3/4	34-3/8	2-3/16	300
	150 x 150	40P60A	28	7-1/8	9	40-1/2	1-1/2	260
4 x 6	300 x 150	40P60C	9	8-7/8	10	40-7/8	1-7/8	350
	600 x 150	40P60D	1000	8-7/8	10	40-1/2	2-1/16	530
	150 x 150	60Q80A	36	9-7/16	9-1/2	9-7/16		530
6 x 8	300 x 150	60Q80C	5	9-1/2		43-3/8	2-3/16	645
	600 x 150	60Q80D	30	9-7/16	9-1/2	45-7/8	2-1/2	495
	150 x 150	60R80A	0	9-7/16	9-1/2	42	1-13/16	550
6 x 8	300 x 150	60R80C	60	9-7/16	10-1/2	44-7/8	2-3/16	675
6 x 10	600 x 150	60R80D	0	9-7/16	10-1/2	46-3/4	2-1/2	620
	150 x 150	80T10A	45	10-3/4	48-1/2		2-1/16	840
	300 x 150	80T10C	20	10-7/8	11		3	


23
0
30
0

Parts List & Material Selection

Index	Description	Materials, Codes & Temperature Ranges				
		-20°F to +450°F (-29°C to +232°C) C1	-20°F to +450°F (-29°C to +232°C) C2	-20°F to +800°F (-29°C to +426°C) C4	-300°F to +450°F (-149°C to +232°C) S1	-300°F to +800°F (-149°C to +427°C) S3
1	Cap	ASTM A108	ASTM A108	ASTM A108	316 Stainless Steel	316 Stainless Steel
2	Adjusting Screw	Plated Carbon	316 Stainless Steel	Plated Carbon Steel	316 Stainless	316 Stainless
3	Adjusting Lock Nut	Steel Plated	316 Stainless Steel	Plated Carbon Steel	Steel 316	Steel 316
4	Cap Gasket	Carbon Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
5	Spring Plate	316 Stainless	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless
6	Stem	Steel 316	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	Steel 316
7	Spring	Carbon Steel	T316	Inconel®X750	T316	Stainless Steel
8	Stem Joint Ball	440C	440C	Cobalt	440C	440C
9	Stem Joint	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
10	Stem Joint Retainer	T302	Inconel®X750	Inconel®X750	T302	Inconel®X750
11	Guide	17-4PH	316 Stainless Steel	17-4PH	A479 316	17-4PH
12	Guide Gasket	Soft Iron	SA240 316	Soft Iron	SA240 316	SA240 316
13	Disc	316SS or CF8M	316SS or CF8M	316SS or CF8M	316SS or CF8M	316SS or CF8M
14	Drain	SA105	SA105	SA105	SA182 F316	SA182 F316
15	Plug	316SS or CF8M	316SS or CF8M	316SS or CF8M	316SS or CF8M	316SS or CF8M
16	Nozzle	316SS or CF8M	316SS or CF8M	316SS or CF8M	316SS or CF8M	316SS or CF8M
17	Washer	Soft Iron	316 Stainless Steel	Soft Iron	316 Stainless Steel	316 Stainless Steel
18	Gasket Body/Nozzle	WCB	WCB	WCB	CF8M	CF8M
19	Bonnet	SA193 Gr. B7	WCB	WCB	CF8M	SA193 Gr. B8
20	Bonnet Stud	SA194 Gr. 2H	SA193 Gr.	320 L7M or Gr. 8	SA193 Gr. B8	SA193 Gr. B8
21	Bonnet Stud Nuts	WCB	B7 SA194	SA194 Gr. 2H	A194 Gr. 8	A194 Gr. 8
22	Body	316SS or CF8M	Gr. 2 WCB	WCB	CF8M	CF8M
23	Disc Holder	T302	316SS or CF8M	316SS or CF8M	316SS or CF8M	316SS or CF8M
24	Disc Retaining Ring	Soft Iron	Inconel®X750	Inconel®X750	Stainless Steel	Inconel®X750
25	Lock Pin Gasket	316 Stainless Steel	SA240 316	Soft Iron	SA240 316	SA240 316
26	Lock Pin	Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
26	Name Plate (Not Shown)		Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Soft Seat Option						
27	Disc Holder	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
28	Seat O-Ring	Specify	Specify	Specify	Specify	Specify
29	Retaining Ring	Inconel®	Inconel®	Inconel®	Inconel®	Inconel®
30	O-Ring	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
31	Retainer	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Packet & Open Lift Lever						
32	Screw	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
33	Lever	Carbon Steel	Carbon Steel	Carbon Steel	Stainless Steel	Stainless Steel
34	Lever Pin	Carbon Steel	Carbon Steel	Carbon Steel	Stainless Steel	Stainless Steel
35	Lock Nut	Carbon Steel	Carbon Steel	Carbon Steel	Stainless Steel	Stainless Steel
36	Washer	Carbon Steel	Carbon Steel	Carbon Steel	Stainless Steel	Stainless Steel
37	Lift Dog	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
38	Nut	SA194 Gr. 2H	SA194 Gr. 2H	SA194 Gr. 2H	SA194 Gr. 8	SA194 Gr. 8
39	Stud	SA193 Gr. B7	SA193 Gr. B7	SA193 Gr. B7	SA193 Gr. B8	SA193 Gr. B8
Gag Cap						
40	Gag Bolt	Carbon	Carbon	Carbon	Stainless	Stainless
41	Gag Nut	Steel	Steel	Steel	Steel	Steel
42	Washer	Carbon	Carbon	Carbon	Stainless	Stainless
Bellows Valve						
43	Bellows Assembly	316 Stainless Steel	316 Stainless Steel	Carbon® 625	316 Stainless Steel	Carbon® 625
44	Disc Holder Gasket	Soft Iron	ASME SA240 316	Soft Iron	ASME SA240 316	ASME SA240 316

Taylor Valve reserves the right to substitute Inconel® or 17/7SS in lieu of 316SS for higher pressure springs.
Materials: WCB/WCC-ASME SA216, CF8M-ASME SA351

2500 Component Parts

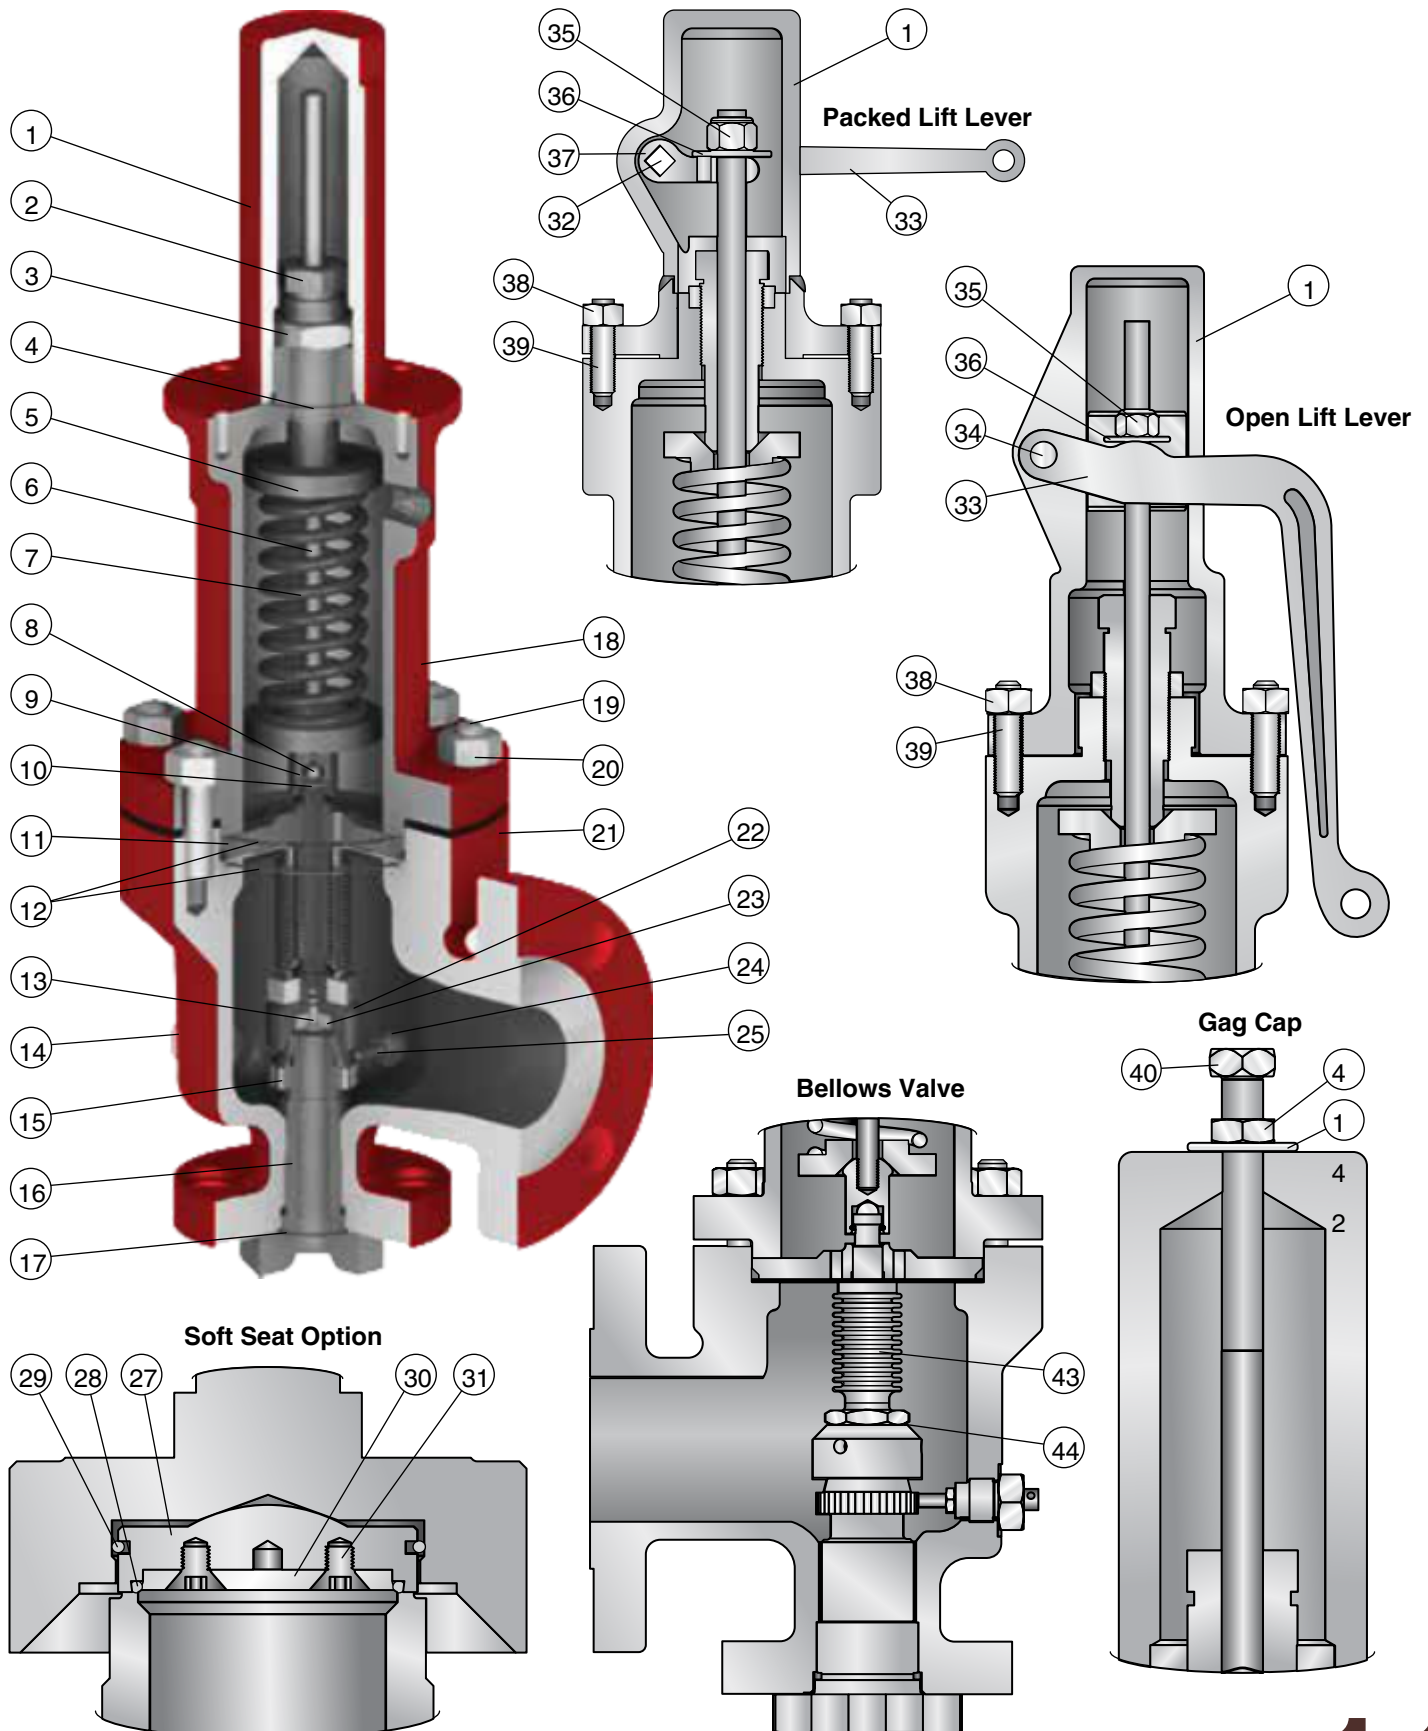



Contact: Adaptive Industrial Solutions
(877) 818-5009 or Sales@adaptiveind.com



Precise.

Quality.

Reliable.

