



SIMRIZ® 134

Designed for thermal stability and nearly universal protection against chemical attack, Freudenberg's proprietary family of Simriz® perfluoroelastomer compounds offer premier sealing performance. Simriz® compounds approach PTFE chemical resistance while resisting high temperatures up to 325 °C.

Freudenberg Sealing Technologies is the only vertically integrated supplier of perfluoroelastomer.


Traceable – Accountable – Customized – Controlled.

Simriz® 134 performs well in a wide variety of harsh chemicals. Its outstanding resistance against rapid gas decompression (RGD) makes Simriz® 134 the perfect match for high pressure gas applications.

NORSOK M-710 (Rev. 2) Certified

Test Conditions	
Temperature	100 °C (212 °F)
Gas	90 mol% Methane (CH ₄) 10 mol% Carbon Dioxide (CO ₂)
Pressure Gradient	15 MPa
Cycling	10 Cycles
Test Results	
Rating	No internal cracks No Blisters No Holes

Steam Resistance at 160 °C/320 °F

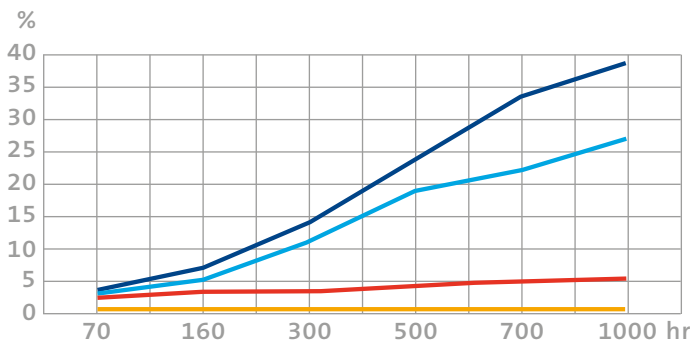

VALUES FOR THE CUSTOMER

- Combines RGD and broad chemical resistance as well as a high thermal stability
- Withstands extremely high pressure as well as steam sterilization and autoclaving
- NORSOK M710 rev.2 certified
- Without equal. Patented cross-linking system provides superior performance beyond the limits of every other competitor FFKM product
- Demonstrated performance. Successfully used in many customer applications
- Vertically integrated. Freudenberg Sealing Technologies is the only vertically integrated O-ring manufacturer in the world
- Cost efficient. As the only vertically integrated O-ring manufacturer down to the monomers Freudenberg Sealing Technologies is able to provide the most cost efficient FFKM O-rings

TYPICAL APPLICATIONS

- Pumps
- Valves
- Oilfield completion equipment
- Perforating equipment
- Drilling equipment
- Intervention tools
- Compressors

- Simriz® 498
- Simriz® 134
- Competitor 1
- Competitor 2



FEATURES AND BENEFITS

Mechanical Properties	
Hardness (Shore) DIN ISO 7619-1, Shore A, 23 °C	90
Temp. Range in °C	-15 °C to +230 °C
Temp. Range in °F	+5 °F to +446 °F
Tensile Strength (psi)	3,118
Tensile Strength (MPa)	21.5
Elongation (%)	160
Compression Set (%) 70hr at 204 °C (400 °F) per ASTM D395 - Method B	23
Chemical Environment	
Hot Water / Steam	++
Dry Heat	+
Organic Acid (e.g. Acetic Acid)	-
Inorganic Acids (e.g. Nitric Acid)	-
Alkalis / Bases	++
Acrylic or Vinyl Monomers	++
Amines	++
Hot Amines	++
Ketones	++
Ester	++
Ethers	++
Aldehydes	++
Hydrocarbons	++
Sour Gas (e.g. Hydrogen Sulfide, Peroxide)	++
Silanes and Chlorosilanes	++
Hot Lubricants	++
Strong Oxidizers (e.g. Nitric Acid, O ₃ , ClO ₂)	-
Fluorinated Fluids	++
Synthetic Oils	++
Alcohols	++

The information contained herein is believed to be reliable, but no representations, warranties or guarantees of any kind are made as to its accuracy or suitability for any purpose. The information reproduced herein is based on laboratory testing and is not necessarily indicative of the performance of the final product. The user is responsible for performing complete testing and for the performance of the final product.

www.fst.com